

STANDARD HORIZONTAL 18-26 AWG 201-01-127

1. SPECIFICATION DISTRIBUTION

No restrictions for issue

2. SCOPE

This specification contains the application notes for the 9276 poke home wire to board connectors.

3. PRODUCTS


00-9276-00X-021-X06 – Wire to board Poke-Home connectors

See specification 201-01-125 for recommended wires sizes used with this connector

Note: refer to the 00-9276-01 sales drawings to obtain the colours available for this connector series. The colours used in this document are for illustration purposes only.

4. 9276 PRODUCT RANGE

4.1. 9276 HORIZONTAL MOUNT CONNECTOR

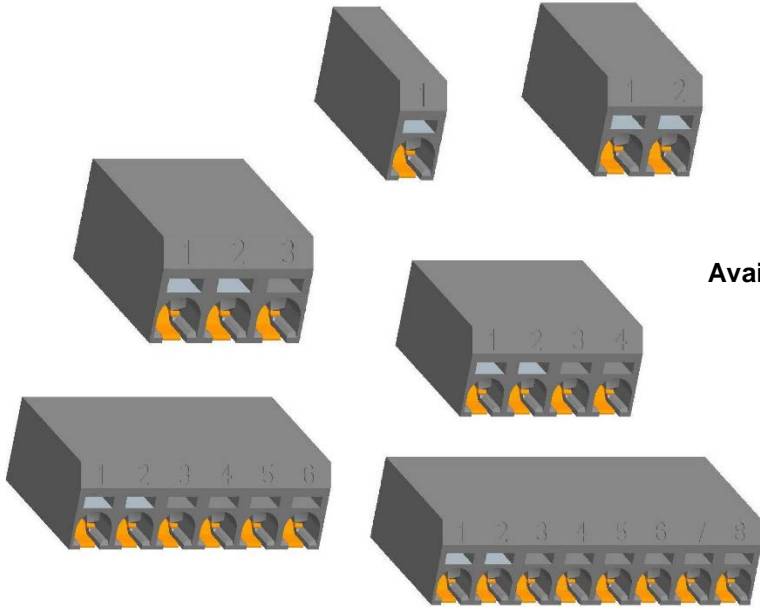

Available in 1, 2, 3, 4, 6 and 8 way sizes.


4.2. 9276 WIRE EXTRACTION TOOL




Thin tip tool to insert in slot above wire to extract wire from connector.

We also recommend the use of this tool when inserting stranded wires. Stranded wires with a small strand count may not require the use of the wire insertion tool. assemble as solid conductor.

4.3. 9175 WIRE INSERTION – SOLID CONDUCTOR

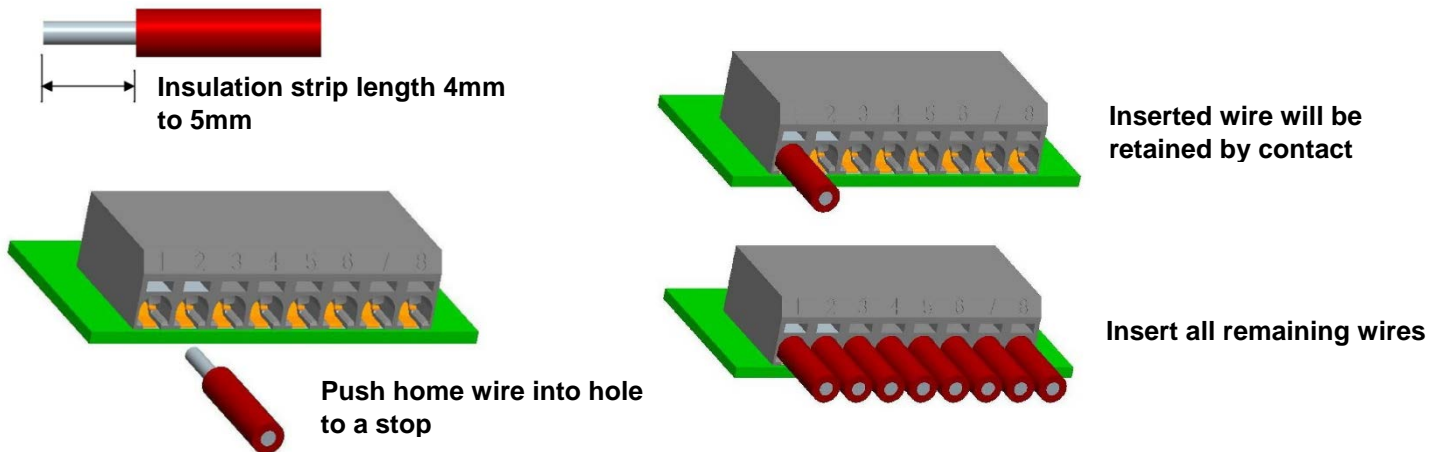

4.4. 9276 WIRE INSERTION – RECOMMENDED METHOD FOR STRANDED WIRES

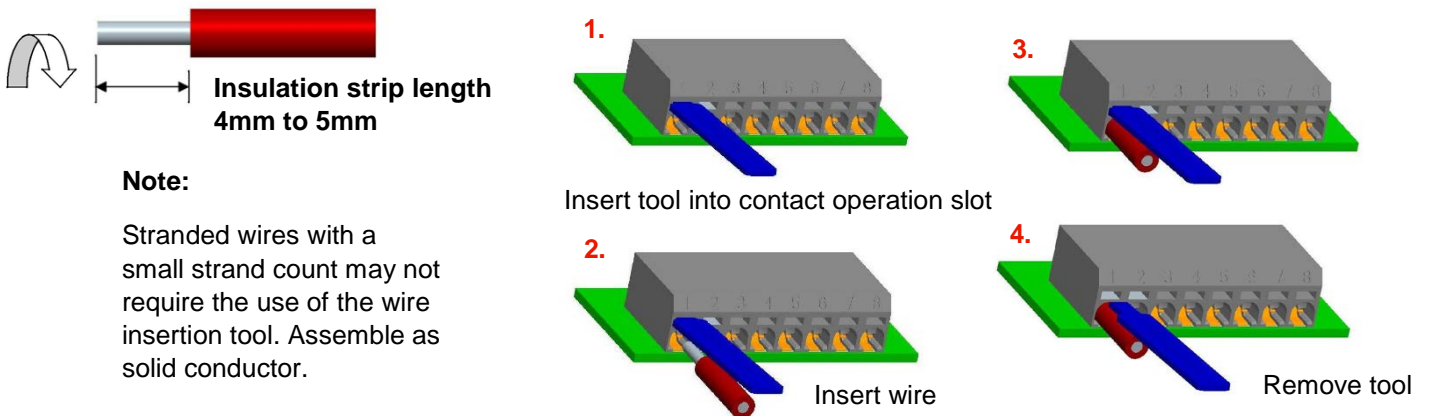

4.5. 9276 WIRE EXTRACTION METHOD

