

# TECHNICAL PAPER

## Predicting Metal Film Capacitor Lifetime Using Thermal Simulation

**Youssef Laamimat**

*KYOCERA AVX Components Corporation*

One AVX Boulevard  
Fountain Inn, S.C. 29644 USA

---

### **Abstract**

In high-power applications like electric vehicles (EVs), customized metal film capacitors are often required to meet energy demands in a specific form factor. These capacitors exhibit a strong temperature dependence of their bulk capacitance over time, which directly limits their total service life. To maximize lifetime while minimizing space requirements, it is important to include accurate thermal simulation as part of the design process to ensure optimized and evenly distributed heat generation.



# PREDICTING METAL FILM CAPACITOR LIFETIME USING THERMAL SIMULATION

## INTRODUCTION

In high-power applications like electric vehicles (EVs), customized metal film capacitors are often required to meet energy demands in a specific form factor. These capacitors exhibit a strong temperature dependence of their bulk capacitance over time, which directly limits their total service

life. To maximize lifetime while minimizing space requirements, it is important to include accurate thermal simulation as part of the design process to ensure optimized and evenly distributed heat generation.

## METAL FILM CAPACITORS

With the discovery of advanced polymers in the mid-20th century, a new capacitor was introduced that used plastic dielectrics to replace traditional paper-based designs. Figure 1 shows that a multi-layer sandwich of metal electrodes and plastic film separators creates a capacitive structure. The electrodes are either deposited directly on the film (metallization) or are built from separate metal foils. The layered capacitor is wound on a bobbin, and a terminal contact layer is deposited to connect everything in parallel. These devices are commonly known as metal film capacitors.

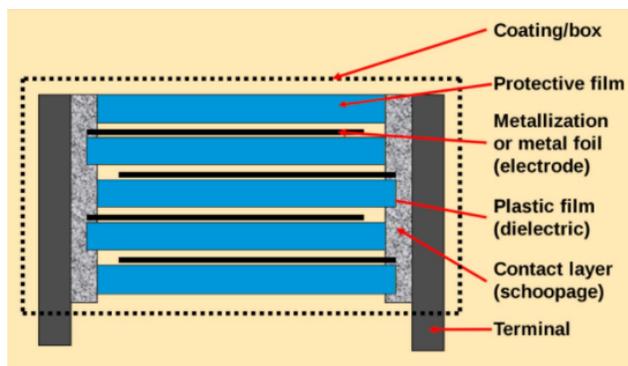


Figure 1. Typical film capacitor construction

Individual bobbins can be customized for shape, size, and capacitance and connected in banks

to form the final device. An example is shown in Figure 2, where eleven bobbins are connected in parallel and interfaced via two sets of terminals.

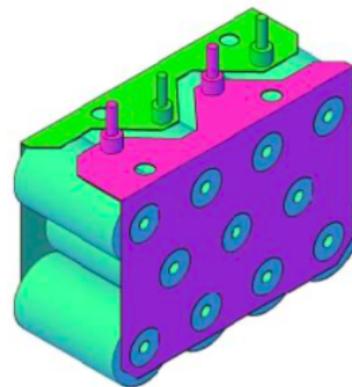


Figure 2. Custom multiple bobbin capacitor design

The arrangement of the bobbins can be optimized to suit the available space, resulting in excellent volumetric efficiency. The arrays can also be balanced for current and inductance to eliminate expansion problems, enabling operation across a temperature range of -55 °C to +125° C. These qualities make metal-film capacitors ideal for electric vehicles (EV) applications where high reliability and harsh environmental tolerance is critical.

## LIFE EXPECTANCY OF FILM CAPACITORS

Unlike electrolytic capacitors that create a catastrophic short circuit after failure, metal-film capacitors exhibit a unique self-healing property. Whenever the dielectric fails, the resulting local

heat vaporizes the metallization and opens the short circuit. As such, film capacitors experience a parametric loss of capacitance of about 5% over their lifetime with no catastrophic failure mode.

# PREDICTING METAL FILM CAPACITOR LIFETIME USING THERMAL SIMULATION

## LIFE EXPECTANCY OF FILM CAPACITORS

This graceful failure characteristic is another reason film capacitors are a great fit for EV applications.

The lifetime of film capacitors is very dependent on environmental and electrical factors. Unlike other devices, vibration, shock, and humidity have minimal effect. However, electrical factors play a leading role in determining reliability, including operating voltage, ripple current, and charge-discharge duty cycle. In addition, ambient temperature and internal heating due to ripple

current are very critical. This is demonstrated in Figure 3, where the operational lifetime is shown as a function of both temperature and applied voltage for a common metal film capacitor.

The lifetime, in this case, is quantified by a specified decrease in bulk capacitance and ranges six orders of magnitude. It is worth noting that even after the end of life point, the capacitors will continue to function without catastrophic failure, giving the designer several degrees of freedom to maximize reliability.

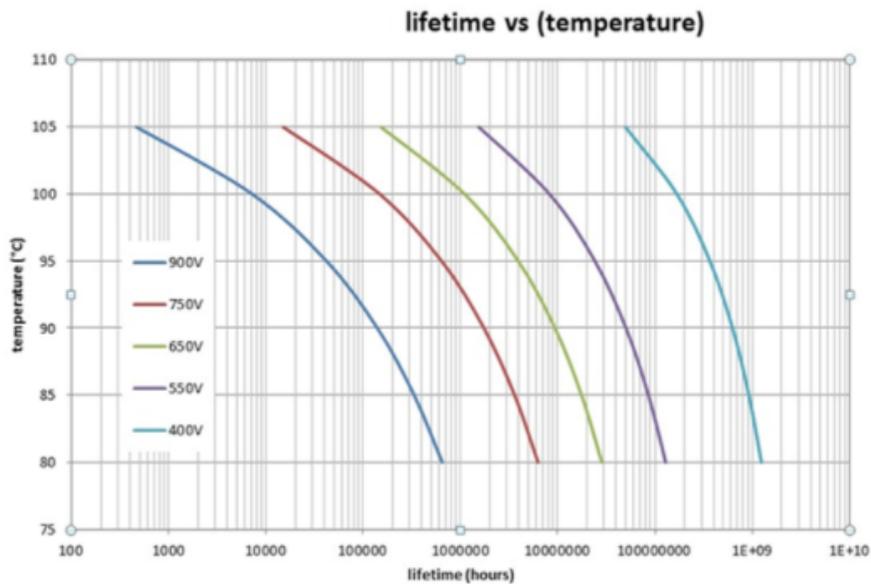


Figure 3. Relationship between lifetime, temperature, and voltage for film capacitors

## THERMAL MODELING OF METAL FILM CAPACITORS

Since temperature is such a strong lever in film capacitor lifetime, KYOCERA AVX uses a multi-physics simulator to properly characterize custom capacitors' thermal performance to maximize their life expectancy. This is particularly relevant in EV applications where proximity to other heat-generating electronics and overall self-heating due to voltage ripple demand the designer's attention. The capacitor consists of physical elements such as housing, resin, bobbins (metalized film), busbars, and insulators. Each element is defined by its specific thermal properties, including electrical and thermal conductivity. As the main element of the capacitor, the bobbin is the most

complex to model. It is typically constructed with anisotropic materials that depend on the direction of metallization and the thickness of the film. The generated heat from the bobbins is induced by the RMS current, the number of bobbins, and their resistance characteristics.

The busbar is the second major component of the capacitor. Traditional coupled Joule heating is used with specific properties of the material (CuA1) and the DC current going through the part (by the selected DC surfaces) to simulate the heat from the busbars.

# PREDICTING METAL FILM CAPACITOR LIFETIME USING THERMAL SIMULATION

## THERMAL MODELING OF METAL FILM CAPACITORS

Common input parameters to the simulation may include ambient temperature, nearby power devices, connector characteristics, and AC/DC current. The result of such a simulation is shown in Figure 4, where the range of bobbin temperatures is shown throughout the device and the busbar contributions are included.

These results allow designers to alter the bobbin shape, size, orientation, and connection methods to minimize hot spots and peak temperature distribution. This, in turn, will extend the lifetime of the part and enable greater design freedom in other areas that may be constrained.

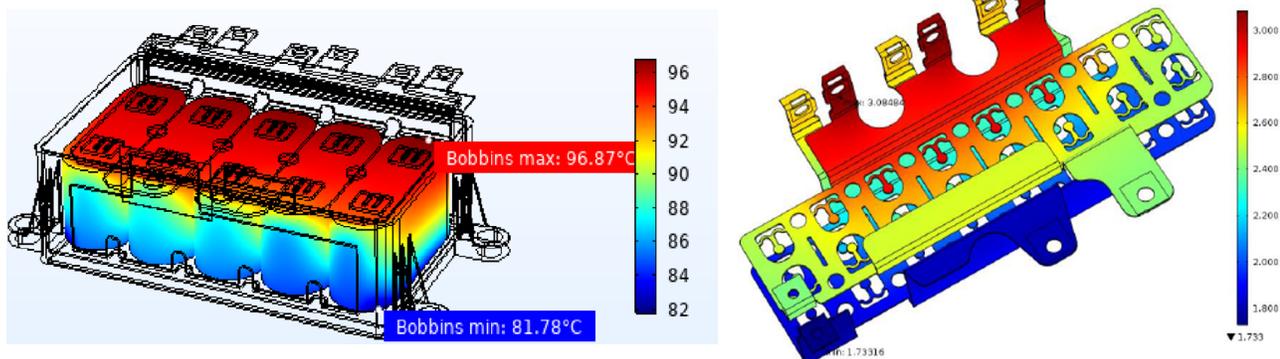


Figure 4. Thermal simulation of a multi-bobbin film capacitor (left) and bus-bar (right)

## CASE STUDY

Following the different voltages and duration distributions given by an example customer, different hotspot temperatures (T1, ...T5) can be calculated. The end of life of the capacitor can be simulated as a maximum -5% drift of the initial bulk capacitance. Figure 5 shows that the initial lifetime calculated for this custom capacitor is approximately 10,000 hours.

The temperature at this point directly heats the bobbins without any thermal path for dissipation. A thermal sink was added to dissipate this heat before reaching the bobbins by making a minor internal design change. A reduction of several degrees of temperature was simulated and confirmed with thermocouples on the physical device. This modification made the customer's 50,000-hour lifetime goal achievable.

In this example, the primary hotspot is located under the IGBT connections to the capacitor.

Profil de U & T°C :

		T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	
Température (°C) :		95	100	103	105	108	0	0	0	0	0	
Heures (%) :		60,00%	20,00%	12,00%	5,00%	3,00%	0,00%	0,00%	0,00%	0,00%	0,00%	100,00%
Consommation de durée de vie												
Tension (V)	Heures	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	T =
1	380	3000	10,60%	5,91%	4,71%	2,35%	1,83%	0,00%	0,00%	0,00%	0,00%	25,40%
2	400	2000	7,75%	4,52%	3,45%	1,72%	1,34%	0,00%	0,00%	0,00%	0,00%	18,59%
3	425	2950	12,77%	7,12%	5,68%	2,84%	2,20%	0,00%	0,00%	0,00%	0,00%	30,61%
4	450	1900	6,25%	3,48%	2,78%	1,39%	1,08%	0,00%	0,00%	0,00%	0,00%	14,97%
5	475	750	3,98%	2,22%	1,77%	0,88%	0,69%	0,00%	0,00%	0,00%	0,00%	9,53%
6	0	0	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%
7	0	0	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%
8	0	0	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%
9	0	0	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%
10	0	0	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%	0,00%
T heures = 10000			41,34%	23,05%	18,39%	9,18%	7,13%	0,00%	0,00%	0,00%	0,00%	99,10%
T durée de vie 10090,85												
		Durée de vie (heures)		ΔC/C = -5% :		10091		Durée de vie tenue				

Figure 5. Hotspot simulations for various voltages to determine capacitor lifetime

## PREDICTING METAL FILM CAPACITOR LIFETIME USING THERMAL SIMULATION

---

### KYOCERA AVX CAPACITOR SOLUTIONS

While metal film capacitors are ideal in many high-power applications, including automotive EVs, a thorough understanding of their thermal characteristics is critical to achieving design success. Since these capacitors are often customized specifically for their end-use, advanced electrical and thermal simulation tools can be used to accurately predict film capacitors' operating corners. The results of these simulations can inform very basic design changes that have profound effects on the lifetime and reliability of the capacitors. Visit KYOCERA AVX's [website](#) to learn more about their capacitor offerings and design solutions.



**NORTH AMERICA**  
Tel: +1 864-967-2150

**CENTRAL AMERICA**  
Tel: +55 11-46881960

**EUROPE**  
Tel: +44 1276-697000

**ASIA**  
Tel: +65 6286-7555

**JAPAN**  
Tel: +81 740-321250

**NOTICE:** Specifications are subject to change without notice. Contact your nearest KYOCERA AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

[in](#) [f](#) [t](#) [@](#) [v](#)  
[WWW.KYOCERA-AVX.COM](http://WWW.KYOCERA-AVX.COM)