

TECHNICAL PAPER

Using Supercapacitors in Electric Vehicles

Adrian Thomas

KYOCERA AVX Components Corporation
One AVX Boulevard
Fountain Inn, S.C. 29644 USA

Abstract

The improved performance and practicality of electric vehicles (EVs) have merited them a permanent foothold in the overall automotive market. When combined with geo-political and environmental initiatives, it is clear that the demand for EVs will continue to increase long into the future.



USING SUPERCAPACITORS IN ELECTRIC VEHICLES

THE FUTURE OF ELECTRIC VEHICLES

The improved performance and practicality of electric vehicles (EVs) have merited them a permanent foothold in the overall automotive market. When combined with geo-political and environmental initiatives, it is clear that the demand for EVs will continue to increase long into the future. For example, in the United Kingdom, there are new plans that ban sales of all petrol and diesel-powered passenger cars by the year 2030. In parallel, all of the major automotive manufacturers are rushing to electrify their line-ups. Volkswagen, for example, recently released the new all-electric ID.3 (replacing the e-Golf). While this growth and rapid pace of innovation is exciting, it has created a myriad of yet to be solved challenges.

The driving range of EVs, the time required to recharge them, and the charging station infrastructure are three of the biggest problems standing in the way of universal adoption. Driving range is improving continuously as the technology evolves for Lithium-Ion (Li-ion) batteries — the dominant mode of EV energy storage.

For example, Tesla announced in October 2020 the development of a new “tab-less” battery cell design. This design improves heat transfer performance and yields higher energy density and lower overall cost. Even though these batteries are closing the fossil fuel gap on range, they still suffer from limited temperature tolerance, long charging times, and charging cycle wear out. When combined with the relative immaturity of charging infrastructure, the resulting “range anxiety” is a very real barrier to consumers switching to EVs.

THE BENEFITS OF SUPERCAPACITORS IN EVS

One alternative to the chemical battery for storing electrical energy is the supercapacitor. These devices are composed of electrodes, an electrolyte, and an ion-permeable separator. Energy is stored using an esoteric phenomenon known as the electrical double layer, demonstrated by Hermann von Helmholtz in 1853. Though the energy density of supercapacitors is 10 to 50 times lower than Li-Ion batteries, they offer several unique characteristics that make them attractive in EV applications.

First and foremost, supercapacitors exhibit fast charge and discharge times and have an effectively unlimited cycle life. This makes them ideal candidates for regenerative braking systems and during periods of rapid acceleration. By reducing the load on the main EV battery, its lifetime can be extended while simultaneously providing improved driving performance.

USING SUPERCAPACITORS IN ELECTRIC VEHICLES

THE BENEFITS OF SUPERCAPACITORS IN EVS

Outside of the vehicle itself, there exists a clear need to improve the charging network infrastructure and use a smart charging principle to help manage energy demand. A hybrid application of supercapacitors and batteries could be particularly beneficial in solar and wind farm applications where the available energy is unpredictable. The supercapacitors allow for a faster, more efficient means for the system to collect energy and helps to reduce stress on the batteries, improving overall lifetime and reducing cost.

Commercially available supercapacitors already span a wide range of performance metrics for automotive applications. KYOCERA AVX — a leading worldwide manufacturer and supplier of a broad line of active and passive electronic components and interconnects — offers several reliable supercapacitor options for EVs. KYOCERA AVX's supercapacitor lineup is shown in Figure 1 and includes numerous form-factors, capacitance ranges, from 330mF to 3000F, wide temperature ranges, and low ESR.

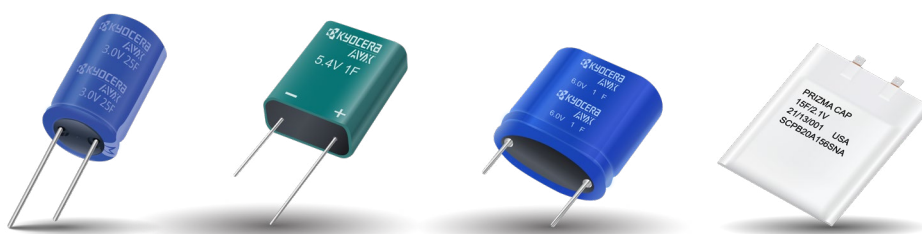


Figure 1 - KYOCERA AVX's SCC, SCM, and SCP Series Supercapacitors

SCC SERIES

Cylindrical SuperCaps


- Acetonitrile (ACN) based electrolyte technology
- Provide extended back-up time, longer battery life, and provide instantaneous power pulses as needed
- Capacitance Range: 1F to 3000F
- 2.7V and 3.0V rated parts
- Operating Temp Range: -40°C to +85°C
- Can offer bent leads on radial leaded offerings per customer request
- SCC LE Series that offer special low ESR products
- Qualifying automotive grade series



SCM SERIES

Series-Connected Modules

- Feature very high capacitance, low ESR, and low leakage current
- Capacitance Range: 0.33F to 500F
- Voltage Range: 5.0V to 48V+
- Operating Temp Range: -40°C to +85°C
- Offer High Reliability SCM Series parts featuring moisture ingress resistance for longer lifetime performance
- Large & custom module design capability for markets such as large industrial, automotive, wind, grid, etc.



PRIZMACAP™

SCP Series

- Propylene carbonate (PC) based electrolyte technology
- Capacitance Range: 3.5F to 15F (and more to come)
- Operating Temp Range: -55°C to +90°C
- Rated Voltage: 2.1V up to +65°C, derating to 1.1V for temp extension up to +90°C operation
- ESR as low as 30mΩ at 1 kHz, 55mΩ at DC
- Leakage current ratings ~50μA
- Low profile starting from 0.8mm and ultra-lightweight from <2 grams
- Customizable form factor
- Utilize KYOCERA AVX Interconnect Single 2 Piece Contacts: BTB, 70-9159 Series connectors instead of hand soldering



Figure 2 - A comparison of KYOCERA AVX supercapacitor offerings

USING SUPERCAPACITORS IN ELECTRIC VEHICLES

THE BENEFITS OF SUPERCAPACITORS IN EVs

Lastly, it's worth noting that supercapacitors contain no hazardous materials, require no maintenance, and are comparatively lightweight. These characteristics make them well suited to automotive applications, especially with the current focus on environmental impact.

By judiciously applying supercapacitors to both the vehicle side and the charging network side of the equation, the goal of completely switching to EVs becomes a more realistic scenario.

ADVANCES IN SUPERCAPACITOR TECHNOLOGY

On average, supercapacitors have energy densities of around 8-10 Wh/kg. The energy density is far below the 200 Wh/kg of a typical Li-ion battery. Closing the gap between the energy densities of supercapacitors and batteries has been the basis of a large body of research worldwide, much of which focuses on advanced materials and construction.

Studies at Penn State University, in collaboration with two universities in China, have shown that by combining Manganese Oxide with Cobalt Manganese Oxide as a positive electrode and a form of graphene oxide for a negative electrode, high power densities and cycling stabilities can be achieved. Polyaniline is also being investigated for use in supercapacitor electrodes.

It is redox-active and can be fabricated to be highly porous, making it an excellent choice for supercapacitors.

Graphene is another highly researched material for supercapacitors. It is a thin layer of pure carbon tightly packed and bonded together in a hexagonal honeycomb lattice. It is widely regarded as a "wonder material" because it is endowed with an abundance of astonishing traits, including high conductivity and high mechanical strength. It is often suggested as a replacement for activated carbon in supercapacitors due to its high relative surface area.

THE ROAD AHEAD

Predicting where the future in EVs and charging networks is going to end up is unclear, but the march towards fully electric transportation will only intensify as government targets approach and more people adopt the technology. There will inevitably be advances in current technology that will help improve the ability for electric vehicles to go further, last longer, charge faster, become lighter, and cost less than they currently do.

Promising material breakthroughs will help the adoption of supercapacitors in automotive applications, and of these, the use of graphene appears to be the most advanced. The potential to make supercapacitors with higher power densities that are maintenance-free and reliable is promising.

USING SUPERCAPACITORS IN ELECTRIC VEHICLES

THE ROAD AHEAD

This material could also result in thinner supercapacitors integrated into body panels, roof paneling, floors, and even doors. In theory, this could provide the vehicle with all the energy it needs and make it considerably lighter than battery-powered electric vehicles. Over the coming years, these technological advancements could impact the widespread adoption of electric vehicles and our ability to reach the goal of becoming fully electric in the future.

KYOCERA AVX's background in researching, designing, and manufacturing supercapacitors has led to the correct preparation, handling, and pre-treatment of materials to provide optimal manufacturing environments that produce repeatable components with exceptional quality. To learn more about KYOCERA AVX's supercapacitor offerings, visit WWW.KYOCERA-AVX.COM.



NORTH AMERICA
Tel: +1 864-967-2150

CENTRAL AMERICA
Tel: +55 11-46881960

EUROPE
Tel: +44 1276-697000

ASIA
Tel: +65 6286-7555

JAPAN
Tel: +81 740-321250

NOTICE: Specifications are subject to change without notice. Contact your nearest KYOCERA AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

[in](#) [f](#) [t](#) [@](#) [v](#)
WWW.KYOCERA-AVX.COM